



WORKSTATION TROLLEY

www.bjjingdong.com









Workstation Trolley

Workstation Trolley

Workstation Trolley

Base	Good quality ABS plastic molding base , exquisite appearance and easy to clean
Pillar	Imported brand super quiet open drop column, height adjustable from 850mm to 1200mm,One - handed operation, flexible and stable.
Table Surface	Compact grade laminate material table surface, it is excellent in anti-acid and corrosion resistance. High - quality PVC arc seal border impact strip, beautiful and safer.
Wheel Castors	Equipped with four noise - free castors with two brakes
Accessories	Castors,Storage Drawer,Displayer Holder,Keyboard&Mouse Holder,Battery Storage Box



1 Battery & Power Control Panel



2 Storage Drawer



7 Lifting Controller



8 Battery Storage Box



9 Hidden mouse carrier



3 Lifting Pillar



4 Castor with Brake



6 Slide Keyboard Holder





5 Displayer Arm





Gas Spring Lifting System Workstation Trolley JDECF312


Base	Good quality ABS plastic molding base , exquisite appearance and easy to clean
Pillar	Metal Pillar design, adopt with gas spring lifting system,top table can be lift and drop freely
Table Surface	Tabie material is the ABS molding with storage space and safe lock;Suitable for laptop and computer
Wheel Castors	Equipped with four noise - free castors with two brakes
Accessories	Castors,Storage Drawer,Displayer Holder,Keyboard&Mouse Holder,Battery Storage Box






Workstation Trolley JDECF334

Side Panel	Aluminum composite panel for side board and back board
Drawer	Aluminum - molding drawer,installs noise - free sliding rail,and PC divider which is convenient for sorted storage of medicine and device;ABS handle;Self - locking
Table Surface	ABS molding top table with stainless steel plate intergrated
Wheel Castors	Equipped with four noise - free castors with two brakes (Tente From Germany)
Accessories	Castors,Storage Drawer,Displayer Holder,Keyboard&Mouse Holder,Battery Storage Box

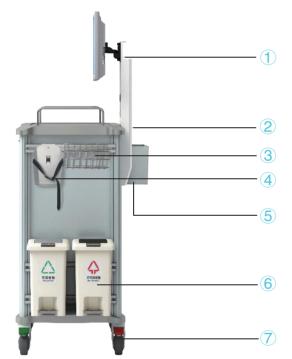





1 Displayer Arm



3 Wire Basket



5 Computer Host Holder



7 Noise - free Castor



9 Glove box



1 Alluminum Molded drawer and PC divider



2 ABS Molding Top Table



4 Needle Box &Holder



6 Waste Bin



8 Extension Table



Hidden keyboard Drawer



12 File box

Workstation Trolley







Workstation Trolley


JDECF313

	Side Panel	Aluminum composite panel for side board and back board
	Drawer	Aluminum - molding drawer,installs noise - free sliding rail,and PC divider which is convenient for sorted storage of medicine and device;ABS handle;Self - locking
	Table Surface	ABS molding top table
,	Wheel Castors	Equipped with four noise-free castors with two brakes (Tente From Germany)
	Accessories	Castors,Storage Drawer,Displayer Holder,Keyboard&Mouse Holder,Battery Storage Box

Drawer color is optional

JDSC-09	JDSC-10	JDSC-45	JDSC-11	JDSC-12	JDSC-47	JDSC-02	JDSC-49	JDSC-05
JDSC-40	JDSC-20	JDSC-19	JDSC-41	JDSC-07	JDSC-21	JDSC-06	JDSC-42	JDSC-43
JDSC-17	JDSC-23	JDSC-38	JDSC-44	JDSC-15	JDSC-39	JDSC-01	JDSC-14	

Workstation Trolley

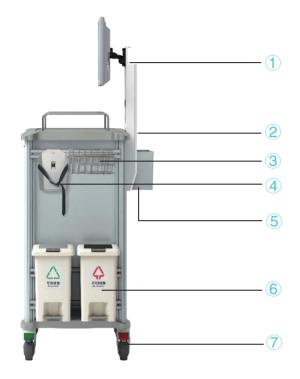





		Trolley Body		
	JDECF311	JDECF312	JDECF314	JDECF315
Dimension (mm)	L495 × W500 × H1223-1473	L570 × W5780 × H1540-1770	L495 × W500 × H1223-H1423	L495 × W500 × H1223~H1423
G.W (KG)	40 35		35	50
Base (mm)	L505×W485	L575×W495	L505×W485	L505×W485
Castors	Four Ф100noise−free Castors two with brake	Four Φ100 twin−side Castors two with brake	Four ⊄100 twin−side Castors two with brake	Four ⊄100 twin−side Castors two with brake
Working Top (mm)	L490×W500	L525×W485	L490×W500	L490×W500
Height (mm)	H850-1100 From work top to ground (Electric lifting)	H680-910 From work top to ground (Gas Spring Lifting System)	H850-1050 From work top to ground (Non-Adjustable)	H850–1050 From work top to ground (Non–Adjustable)
Control Panel	Computer power button LED battery status indicator	_	Computer power button LED battery status indicator	Computer power button LED battery status indicator
Display support	Displayer holder can be adjusted up and down angle of adjustment 0–15°, left and right angle of adjustment –90–90°, aero– weighing 25 kg			

Trolley Body				
	JDECF334	JDECF354	JDECF313	
Dimension (mm)	L650 × W475 × H1360	L650 × W480 × H1381	L750×W475×H1435	
G.W (KG)	55	60	56	
Base (mm)	L650×W475	L650×W480	L750×W475	
Castors	Four ⊄100noise−free Castors two with brake	Four Ф100noise-free Castors two with brake	Four ⊄100noise−free Castors two with brake	
Working Top (mm)	L650×W475	L650×W480	L750×W475	
Height (mm)	H970 From work top to ground (Electric lifting)	H1005 From work top to ground (Gas Spring Lifting System)	H1003 From work top to ground (Gas Spring Lifting System)	
Control Panel	Computer power button LED battery status indicator	Computer power button LED battery status indicator	Computer power button LED battery status indicator	
Display support	Displayer holder can be adjusted up and down angle of adjustment 0−15°, left and right angle of adjustment −90−90°, aero− aluminium, weighing 25 kg			

Accessories List



Storage Drawer-01 JDPDW311



Storage Drawer-02 JDPDW312



Storage Drawer-03 JDPDW313



Storage Drawer-04



PC Transparent Divider JDPGB214A





Telemedicine Displayer

JDPXS312



Camera

JDPSX312



Battery & Power Control Panel

JDPDY312





Digital lock

JDPDZ112

Medical waterproof key mouse

JDPJS312



JDPSE112A



IV Pole JDPSE112B



Defibrillator Shelf JDPYQ131



Computer Host Holder



JDPZJ112



Storage Box JDPSN112



CPR Board JDPQJ224



Lithium Iron Phosphate battery group iron group JDPDC311



Wireless Scanner JDPSM311



Printer Holder JDPDY111



Wire Basket JDPGK112A



Gloves Box Holder JDPST234



Twin-side Castor JDPSL254



Noise-free Castor JDPDL234A



Displayer Arm JDPZJ114



Power Board JDPDY314



Disinfectant Holder JDPSX111



Oxgen Tank Holder Needle Box Holder JDPYQ111



JDPRQ214



Needle Box JDPRQ214



Scanner Holder JDPSM312



Waste Bin JDPWW214B

Computer accessories paramenters





	C	Computer System			
	Type1	Type2	Professional medical level computer all-in-one machine		
CPU	Intel@ Skylake Dual-		Front Reading Light Wireless Lightness Design		
Internal Storage	DDR4 4GB (Max 32GB)	DDR3 4GB (Max 32GB)	Convenient for hospital to disinfect and clean (front •panel IP65)		
Storage	Storage (SSD):128G/256G SATA2		 Hot plug battery design, support 24 hours work Medical Nevel certification (EN60601-1/UL60601-1 		
Graphics Card	Intel@HI	D Graphics	Support remote monitoring, controlling, updating(ORION fit)		
Touch Screen Security	Resistive	Touch Screen			
Information	TPM 1.2 (Trusted Platform Module), Smart Card Reader, RFID ISO 15693/14443A (Optional)				
Automatic Brightness Adjustment	250n	iits√			
Mechanism					
		Mechanism			
Overall Dimensions (W*D)			7x362H(mm)		
	5.		7x362H(mm) 5.5kg		
(W*D)	5.	L542xW77			
(W*D) Total Weight		L542xW77	5.5kg		
(W*D) Total Weight Packing Size	9	L542xW77 5kg 680Lx270 ⁰ .5kg	5.5kg Wx530H (mm)		
(W*D) Total Weight Packing Size Total package weight	9	L542xW77 5kg 680Lx270 ⁰ .5kg	5.5kg Wx530H (mm) 9.5kg		
(W*D) Total Weight Packing Size Total package weight Certification	9 CE/FCC C	L542xW77 5kg 680Lx270 .5kg lass B, UL60601-1, EN	5.5kg Wx530H (mm) 9.5kg 60601-1 CCC 节能认证 (China CECP)		
(W*D) Total Weight Packing Size Total package weight Certification	9 CE/FCC C	L542xW77 5kg 680Lx270 .5kg lass B, UL60601-1, EN Screen Size	5.5kg Wx530H (mm) 9.5kg 60601-1 CCC 节能认证 (China CECP)		
(W*D) Total Weight Packing Size Total package weight Certification	9 CE/FCC C	L542xW77 5kg 680Lx270 .5kg lass B, UL60601-1, EN Screen Size	5.5kg Wx530H (mm) 9.5kg 60601-1 CCC 节能认证 (China CECP)		

Battery Parameter







Lithium Iron Phosphate battery group iron group

Inverter

Charger

Hot-plug battery pack

	Battery System		
Lithium Iron Phosphate battery group iron group	10Ah/single block, 2 pieces per trolley, it supports hot swap, which can realize 24 hours uninterrupted power		
Charger	4A-5A		
Inverter	Max Output Power		
Reactive Power Converter	Dual (Room Electrically Switchable)		
Charging Time	2-3hours		
Running Time	4-5 hours (up to the power consumption load)		
Charging Current	4-5A		
Protection Function	Overtemperature, Overload, High and low voltage, Output Short Circuit, Overcharge, Over-discharge protection		
Battery Certification	CE Certification		
Power Display	LCD Screen/Ten Bars Indication/Voltage Indication		
Attention	Batteries are expendable and not covered by warranty. In order to ensure the battery life, it needs to be recharged every three months.		



In the year of 1984, 'Jingdong' brand was established in Beijing-the capital city of China, it was a production b China National Pharmaceutical Group Corporation. The company's name was Beijing Tongxian Jingdong Instru Factory. In 2005, the company was renamed as Beijing Jingdong Technology Co., Ltd.

Jingdong has established a large global production base in Tangshan, Hebei, covering an area of about 80 tho square meters, in response to 'the belt and road' and the coordinated development of Beijing-Tianjin-Hebe agglomeration, which will be better to help the construction and development of Chinese hospital.



















BEIJING JINGDONG TECHNOLGY CO.,LTD

ADD: Jingdong Bldg, Songzhuang,

Tongzhou district, Beijing,101118 P.R.China

Tel: +86-10-56233228 | Fax: +86-10-89578209

Website: www.bjjingdong.com/en | Email: sales@bjjingdong.com





